



1. MECHANICAL DIMENSIONS :

A
B
C
D
E
F

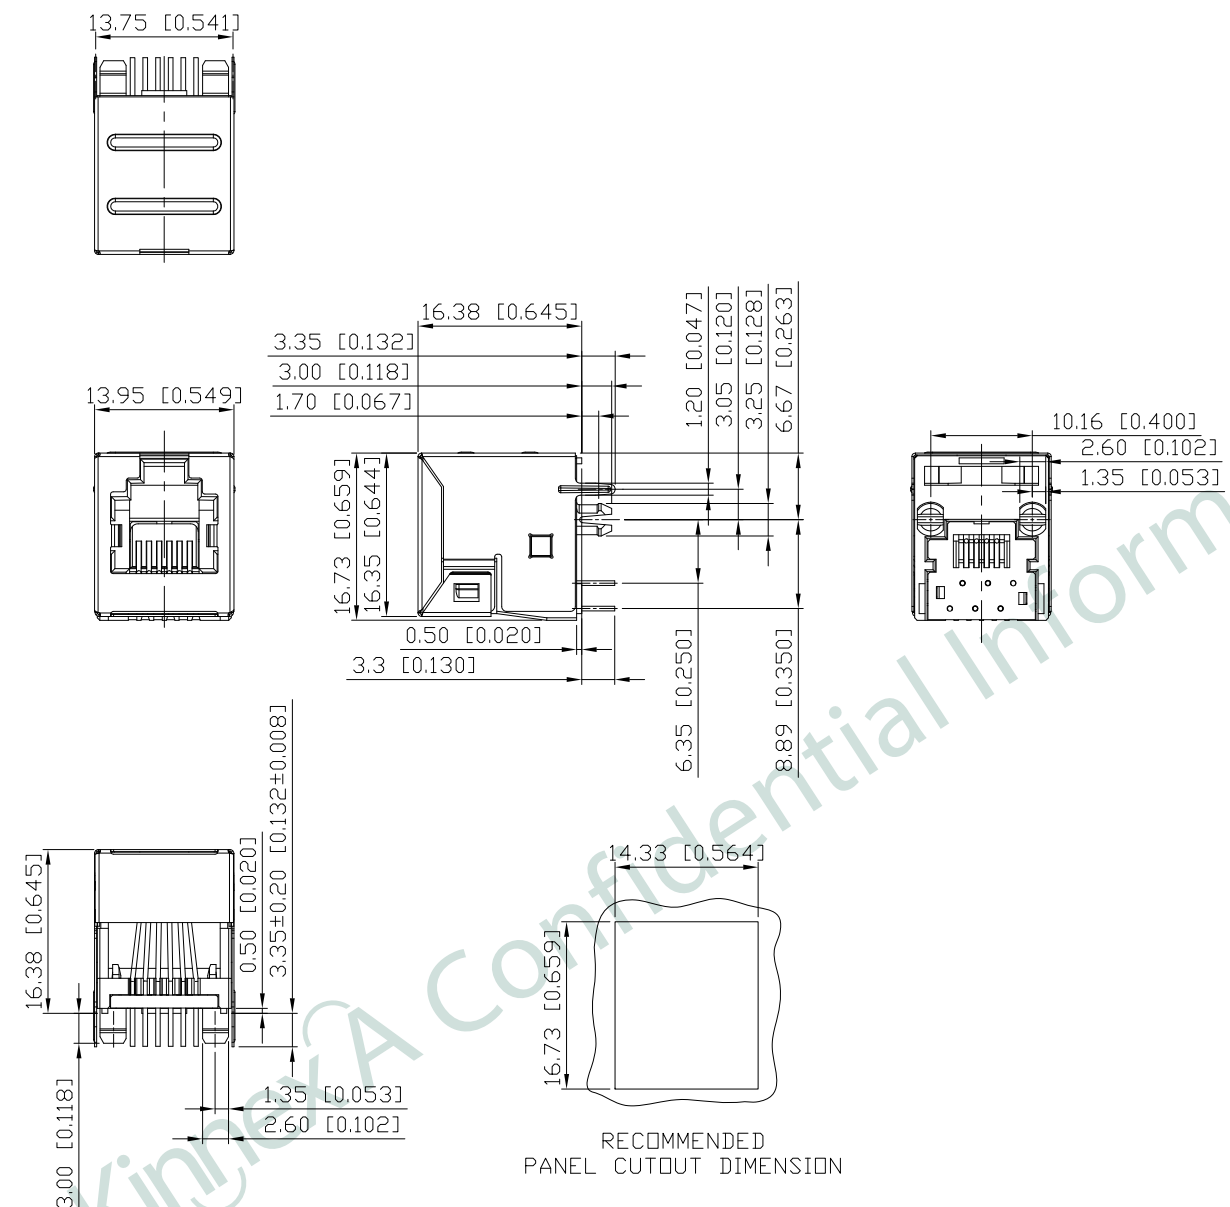



REV.	DATE	DESCRIPTION
01	Dec. 12, '17	1st RELEASE

- NOTES:
- MATERIAL:
HOUSING: HIGH THERMOPLASTIC, UL94V-0, COLOR-BLACK
CONTACTS: $\phi=0.46\text{mm}$ PHOS-BRONZE,
GOLD FLASH PLATING ON CONTACT AREA,
TIN PLATING ON SOLDER AREA,
UNDERPLATED NICKEL OVERALL
SHIELD: T=0.20mm COPPER ALLOY, PLATED NICKEL
 - OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
 - INSERTION FORCE: 4 POUNDS MAX.
EXTRACTION FORCE: 4 POUNDS MAX.
 - DURABILITY: 750 MATING CYCLED MIN.
 - CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
 - UNSPECIFIED TOLERANCE: .XX $\pm 0.25[0.010]$
.X $\pm 0.30[0.012]$

 PART NO		KRV-S-01-6-6-0-GB5		
TITLE	RJ11 6P6C, W/O LED, SHIELDED, VERTICAL TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Dec. 12, '17	1 of 3

RoHS Compliant

2. PCB LAYOUT :

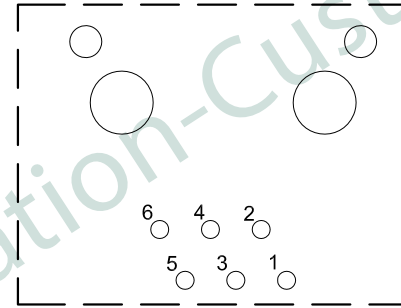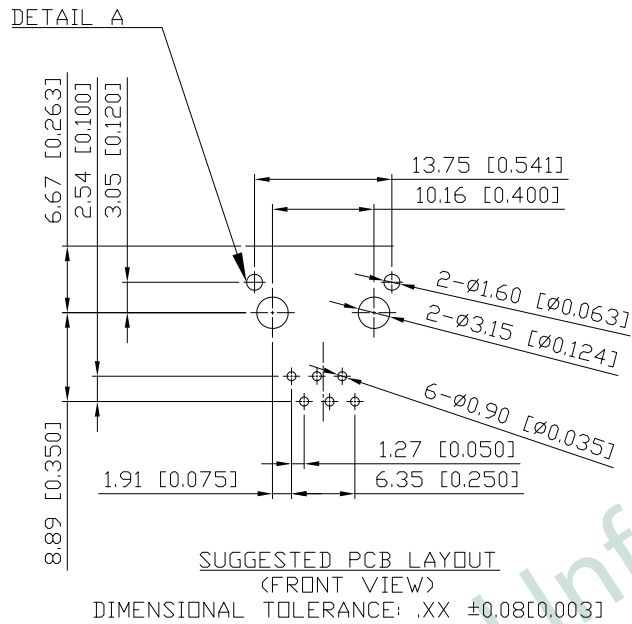

KRV-S-01-6-6-0-GB5

PRODUCT SERIES
KRV: VERTICAL TYPE

SHIELDED TYPE
S: SHIELDED

NO. OF PORTS

NO. OF POSITION

NO. OF CONTACT

LED COLOR OPTION


RUNNING CODE

SERIAL NUMBER

CONTACT GOLD PLATING
S: GOLD FLASH

PART NO		KRV-S-01-6-6-0-GB5		
TITLE	RJ11 6P6C, W/O LED, SHIELDED, VERTICAL TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Dec. 12, '17	2 of 3

3. PROFILE OF WAVE SOLDER :

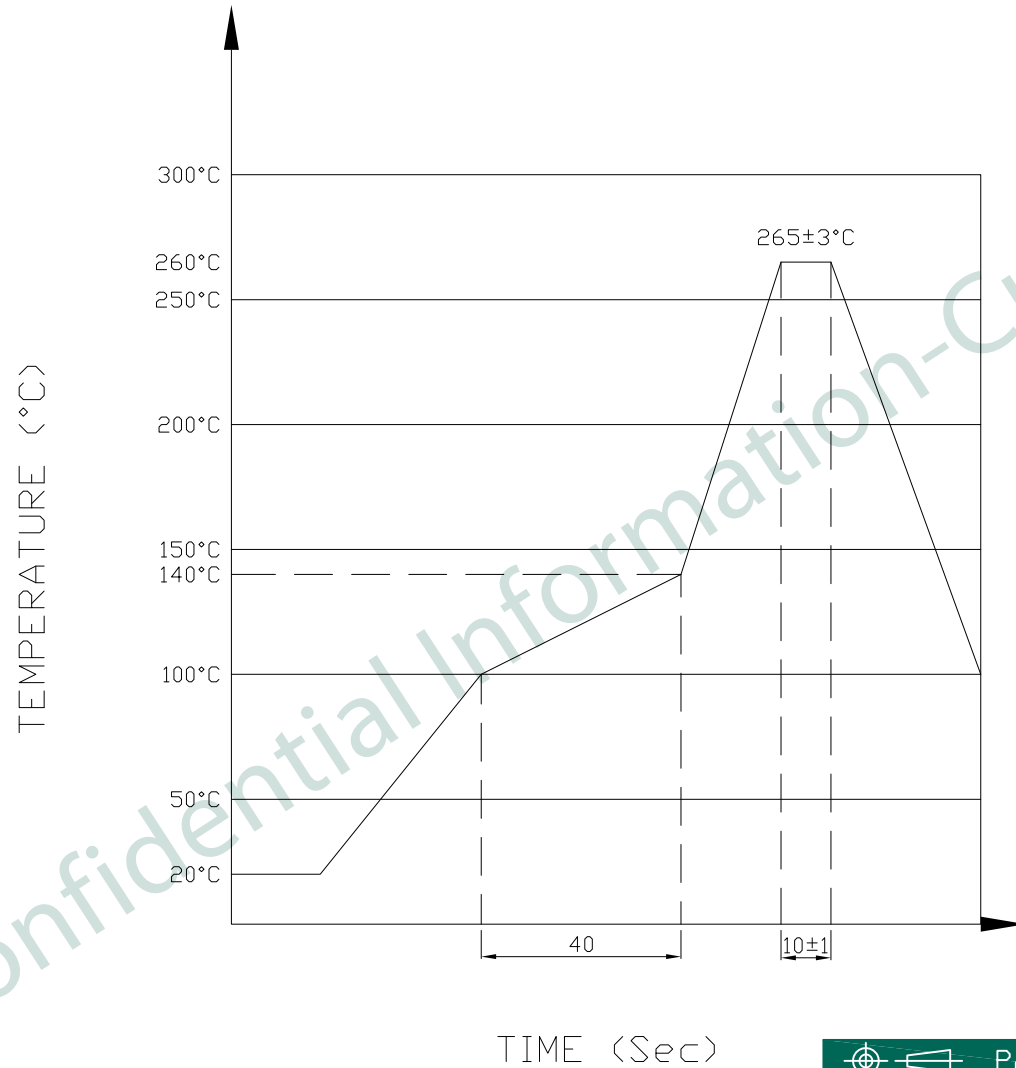

The measuring point for the specified temperature shall be on the soldered part of the lead

PART NO KRV-S-01-6-6-0-GB5				
TITLE	RJ11 6P6C, W/O LED, SHIELDED, VERTICAL TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	DANIEL	Dec. 12, '17	3 of 3